Catalogue No: EREV4-5RD-415VAC

STARTER COMPACT ROLLER DOOR 2.2kW 415V AC CONTROL

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW





Representative Photo Only (actual product may vary based on configuration selections)

Reversing Starter 2.2KW, IP66 Polycarbonate Enclosure, Roller Door Type, Control voltage 415 V AC, Forward, Reverse And Stop/Reset Pushbuttons, No Overload

- Wide range of NHP motor starting method versions available, allowing for correct selection of a motor starter to suit the application load condition requirements during starting
- Available in a number of IP ratings and enclosure type, to allow selection to meet the different installation environments
- Consult NHP for complete offering

SPECIFICATIONS	
Product Series	Streamline Enclosed Motor Starters
kW Rating, AC-3, 415V	2.2 kW @415V
kW Rating, AC-3, 415V, Max	2.6 kW @415V max
Component Type Motor Control and Drives	Reversing Starter
Motor FLC, Max	5.3 A, max
IP Rating	IP66
Motor Connection	3 wire
Enclosure Type	Insulated polycarbonate enclosed (IP 66)
Control Voltage, AC, Nom	415 V AC
Button Arrangement	Forward / Reverse / Stop Reset
REFERENCES	
IECEx Certificate -	
Supplier Declaration of Conformity:	
Installation Guide: -	
User Manual: -	
Manufacturer Datasheet: -	
Manufacturer Catalogue & Product Selection:	




Catalogue No: EREV4-5RD-415VAC

STARTER COMPACT ROLLER DOOR 2.2kW 415V AC CONTROL





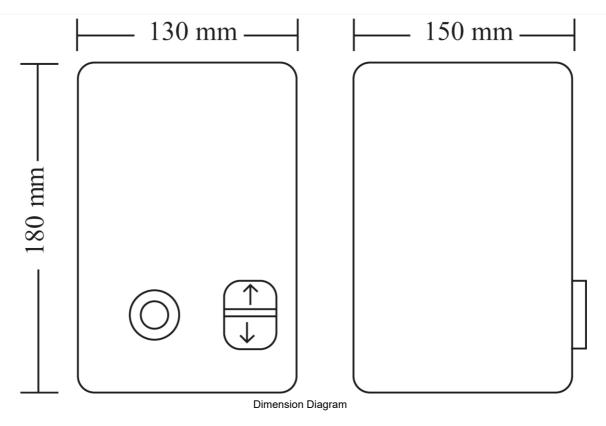



Catalogue No: EREV4-5RD-415VAC

STARTER COMPACT ROLLER DOOR 2.2kW 415V AC CONTROL

Motor Control and Drives > Motor Starting and Protection > Assembled Motor Starters > Sprecher + Schuh Motor Starters > Reversing Motor Starters > EREV4 Streamline Reversing Motor Starters 2.2 to 4kW



