
800H1HZ4

Allen-Bradley 800H Enclosure Stainless Steel 1 Hole 3 4 Inch Conduit Entry for 30.5mm Pushbutton



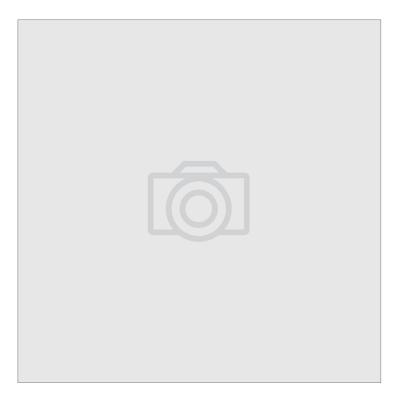


Component type	Control circuit devices combination in enclosure
Range	800T/H Pushbutton
Model	N/A
Product status	Existing

The Allen-Bradley 800T/H range of 30.5mm mount operators are designed and constructed to perform in the most demanding industrial environments. The range includes pushbuttons, selector switches, emergency stops, pilot lights. Available in both metal and plastic types with a modular design allowing for easy selection, configuration and assembly of components to form the operator control device.

Number of push buttons	1.0
Number of key switches	1.0
Number of selector switches	1.0
Number of mushroom-shaped push-buttons	1.0
Material housing	Metal
Degree of protection (IP)	IP65/IP66
Vibration acceleration (Max)	10.0 m/s ²
Vibration frequency, operational (Max)	2000.0 Hz
Shock acceleration (Max)	100.0 g
Height	162.7 mm
Width	88.1 mm
Depth	92.1 mm
Operating temperature	-40 - 55
	Number of key switches Number of selector switches Number of mushroom-shaped push-buttons Material housing Degree of protection (IP) //ibration acceleration (Max) //ibration frequency, operational (Max) Shock acceleration (Max) Height Width Depth



DIMENSIONAL DIAGRAM

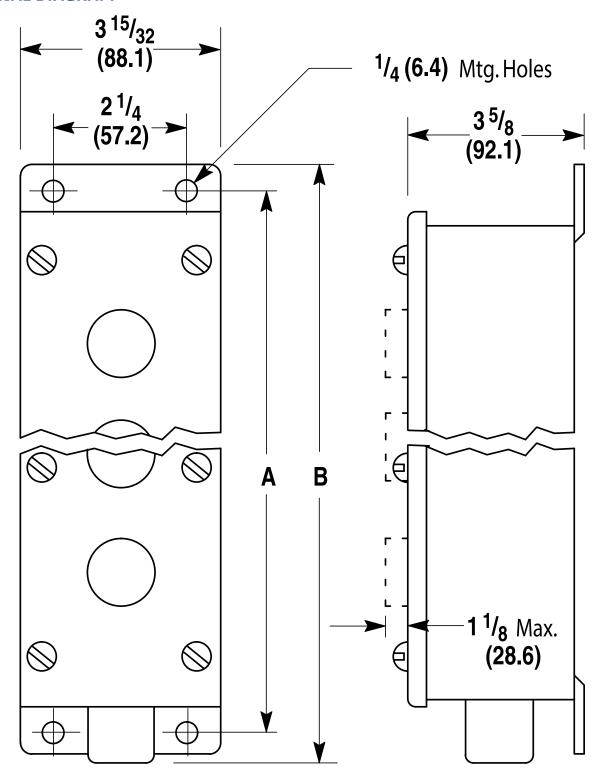

Type 4/4X/13 Stainless Steel Watertight, Oiltight, Corrosion Resistant Enclosure